PENTAIR

MYERS®

Typical Installation

12VL and 12VLX

Duplex 12" Submersible Solids Handling

Lift Out Models: (SRA/SRAX-1212)

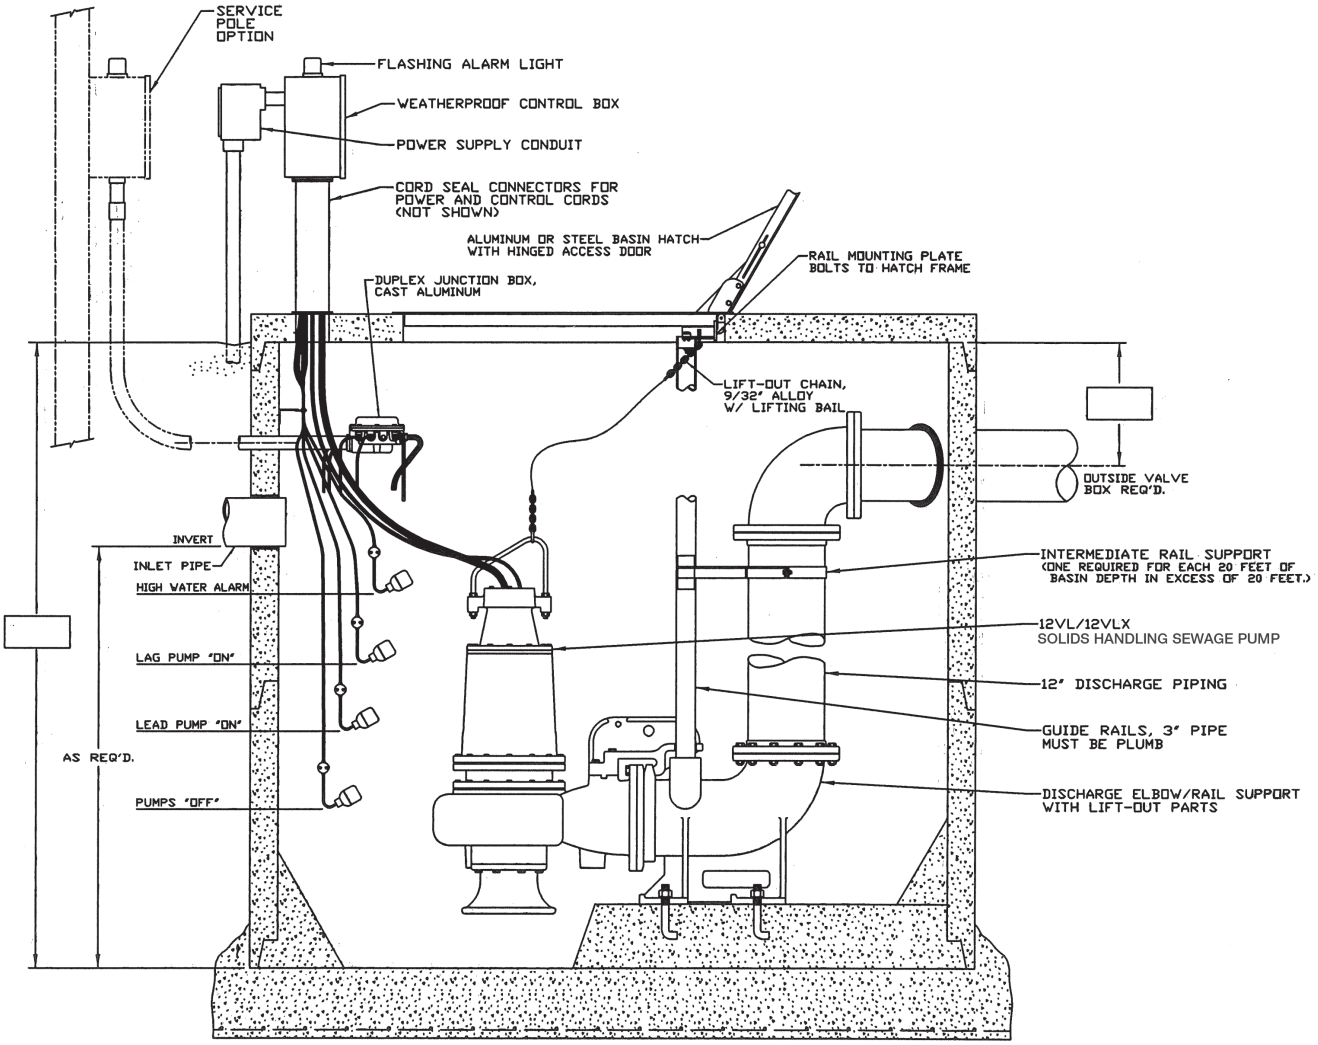

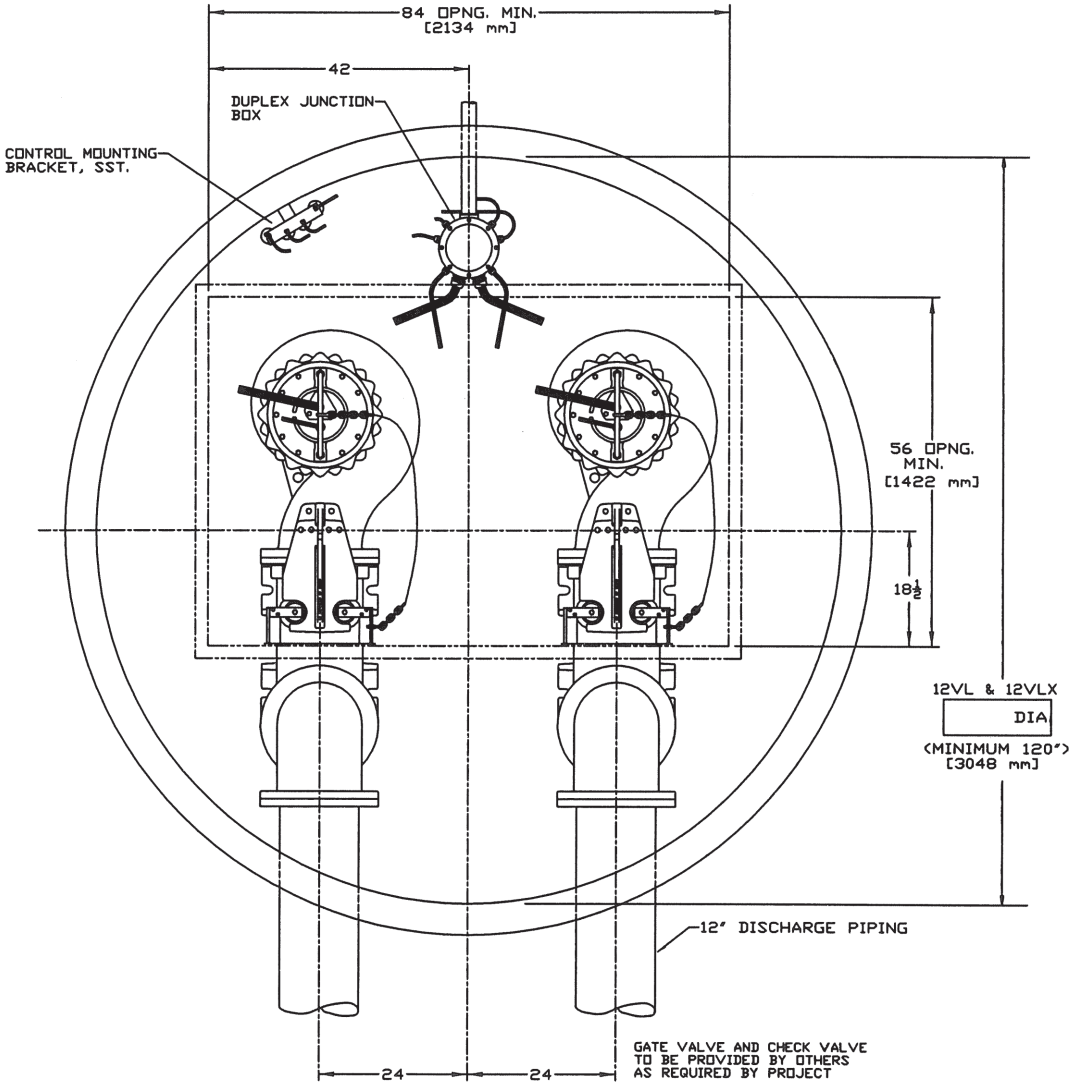
84 OPNG. MIN.
[2134 mm]
42
DUPLEX JUNCTION BOX
CONTROL MOUNTING BRACKET, SST.
56 OPNG. MIN.
[1422 mm]
18½
12VL & 12VLX
DIA
(MINIMUM 120")
[3048 mm]
12" DISCHARGE PIPING
GATE VALVE AND CHECK VALVE TO BE PROVIDED BY OTHERS AS REQUIRED BY PROJECT
24
24